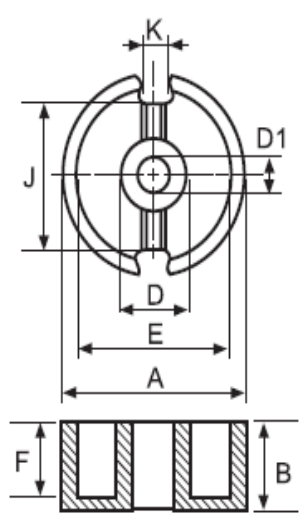


## Technical Data Sheet RoHS Compliant Product

### POT18\*11C, No Gap Core, MnZn

#### Product Specifications:

Parameter		Symbol	Unit	Value	Geometry Drawing Reference
Magnetic Characteristics	Effective Length	$I_e$	mm	25.80	
	Effective Area	$A_e$	mm <sup>2</sup>	43.30	
	Effective Volume	$V_e$	mm <sup>3</sup>	1120.00	
Dimensions	A	-	mm	17.90 ± 0.30	
	B	-	mm	5.30 ± 0.10	
	D	-	mm	7.40 ± 0.15	
	E	-	mm	15.25 ± 0.25	
	F	-	mm	3.80 ± 0.10	
	J	-	mm	11.55 ± 0.30	
	K	-	mm	3.20 ± 0.30	
	D1	-	mm	3.00 ± 0.10	
	A - A'	-	mm	≤ 0.20	
Appx. Weight/Set	Weight	$W$	gm	6.0	

**Appearance & Shape:** To be free from any defect such as flow, burrs, unevenness etc. as per IEC 63093 - 8

**Inspection Criteria:** IEC 60424, Guide on the limits of Surface Irregularities

**Mechanical Strength:** IEC 61631 Compliant

**Compliant:** RoHS & REACH

**Test Conditions:** 1 kHz/300 mV, Coil - N=100 Turns, 25°C

**Power Loss Conditions:** 100 kHz, 200 mT, 100°C

Material Grade	Initial Permeability ( $\mu_i$ )	AL Value (nH/Set)	PV (W/Set)
SFP4	2300 ±25%	2850 ±25%	≤ 0.46
SFP95	3300 ±25%		
SFA05	5000 ±25%		
SFA07	7000 ±25%		
SFA10	10000 ±30%		
SFA12	12000 ±30%		

Other AL values/air gaps and materials available on request