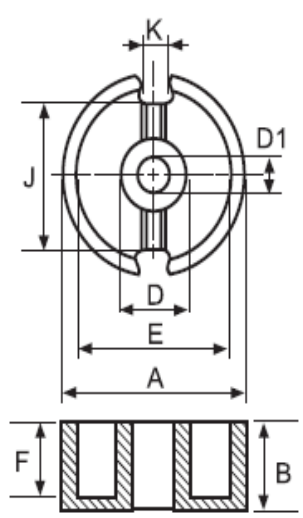


## Technical Data Sheet RoHS Compliant Product

### POT24.3\*17.6CH, No Gap Core, MnZn

#### Product Specifications:

Parameter		Symbol	Unit	Value	Geometry Drawing Reference
Magnetic Characteristics	Effective Length	$l_e$	mm	52.73	
	Effective Area	$A_e$	mm <sup>2</sup>	103.34	
	Effective Volume	$V_e$	mm <sup>3</sup>	5448.97	
Dimensions	A	-	mm	24.30 ± 0.50	
	B	-	mm	8.90 +0/0.45	
	D	-	mm	10.88 ± 0.30	
	E	-	mm	20.83 ± 0.50	
	F	-	mm	5.90 +0.40/-0	
	J	-	mm	16.80 ± 0.35	
	K	-	mm	3.95 ± 0.25	
	D1	-	mm	5.51 ± 0.20	
	A - A'	-	mm	≤ 0.20	
Appx. Weight/Set	Weight	$W$	gm	19.90	

**Appearance & Shape:** To be free from any defect such as flow, burrs, unevenness etc. as per IEC 63093 - 8

**Inspection Criteria:** IEC 60424, Guide on the limits of Surface Irregularities

**Mechanical Strength:** IEC 61631 Compliant

**Compliant:** RoHS & REACH

**Test Conditions:** 1 kHz/300 mV, Coil - N=100 Turns, 25°C

**Power Loss Conditions:** 100 kHz, 200 mT, 100°C

Material Grade	Initial Permeability ( $\mu_i$ )	AL Value (nH/Set)	PV (W/Set)
SFP4	2300 ±25%	4200 ±25%	
SFP95	3300 ±25%		
SFA05	5000 ±25%		
SFA07	7000 ±25%		
SFA10	10000 ±30%		
SFA12	12000 ±30%		

Other AL values/air gaps and materials available on request

Speedofer Components Pvt. Ltd.,

Plot No: 101 & 102, Toy City, Ecotech – III, Greater Noida – 201306, Uttar Pradesh, India. Email: [info@speedofer.com](mailto:info@speedofer.com) URL: [www.speedofer.com](http://www.speedofer.com)

Document Reference: SCPL/TDS/POT24.3\*17.6CH, No Gap Core, Mar 2024