
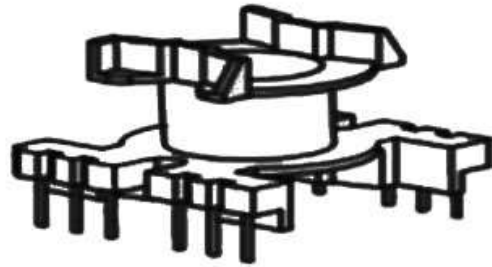
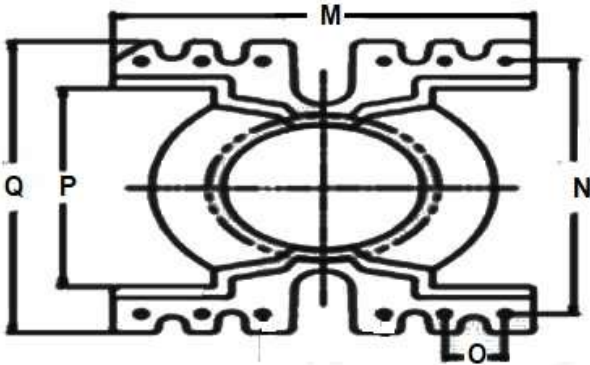
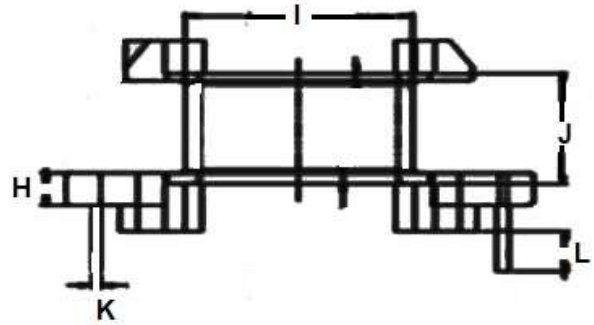
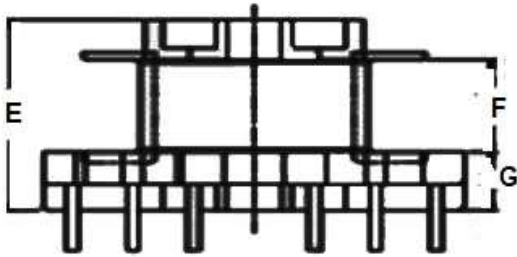


Technical Data Sheet RoHS Compliant Product

PQ26/25V Bobbin (Vertical)

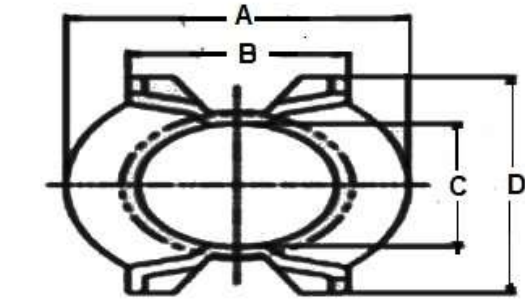

Product Specifications:

Geometry	Supplier	Pin	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
PQ26/25V	SCPL	6+6	21.40	14.20	12.50	22.50	25.40	13.80	7.40	3.30	14.20	16.00	0.80	5.00	26.50	25.40	3.80	20.00	29.40

Geometry: PQ26/25 (V) 6+6 P	Material: Phenolic	Scale:	Angle: $\pm 1^\circ \blacktriangle$
	Pin Material: CP Wire	Unit: mm	Document Rev: 0
	Pin Pitch Tolerance: $\pm 0.20\text{mm}$	UL REQ: UL 94V-0	
	Dimensions Tolerances: 0~4mm: $\pm 0.1\text{mm}$, 4~16mm: $\pm 0.2\text{mm}$, 16~63mm: $\pm 0.3\text{mm}$		