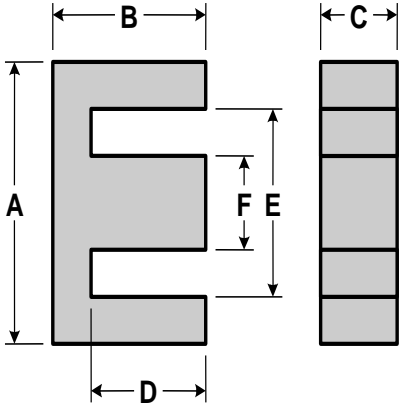


## Technical Data Sheet RoHS Compliant Product

### EE28/10/11, No Gap Core, MnZn

#### Product Specifications:

Parameter		Symbol	Unit	Value	Geometry Drawing Reference
Magnetic Characteristics	Effective Length	$l_e$	mm	51.60	
	Effective Area	$A_e$	mm <sup>2</sup>	81.70	
	Effective Volume	$V_e$	mm <sup>3</sup>	4215.0	
Dimensions	A	-	mm	28.10 ±0.30	
	B	-	mm	10.60 ±0.30	
	C	-	mm	10.70 ±0.25	
	D	-	mm	6.80 ±0.30	
	E	-	mm	20.40 min	
	F	-	mm	7.20 ±0.30	
	A – A'	-	mm	≤ 0.30	
Appx. Weight/Set	Weight	W	gm	24.04	

**Appearance & Shape:** To be free from any defect such as flow, burrs, unevenness etc. as per IEC 63093 - 8

**Inspection Criteria:** IEC 60424, Guide on the limits of Surface Irregularities

**Mechanical Strength:** IEC 61631 Compliant

**Compliant:** RoHS & REACH

**Test Conditions:** 1 kHz/300 mV, Coil - N=100 Turns, 25°C

**Power Loss Conditions:** 100 kHz, 200 mT, 100°C

Material Grade	Initial Permeability ( $\mu_i$ )	AL Value (nH/Set)	PV (W/Set)
SFP4	2300 ±25%	3500 ±25%	≤ 2.40
SFP95	3300 ±25%	4200 ±25%	≤ 2.05
SFA05	5000 ±25%		
SFA07	7000 ±25%		
SFA10	10000 ±30%		
SFA12	12000 ±30%		

Other AL values/air gaps and materials available on request