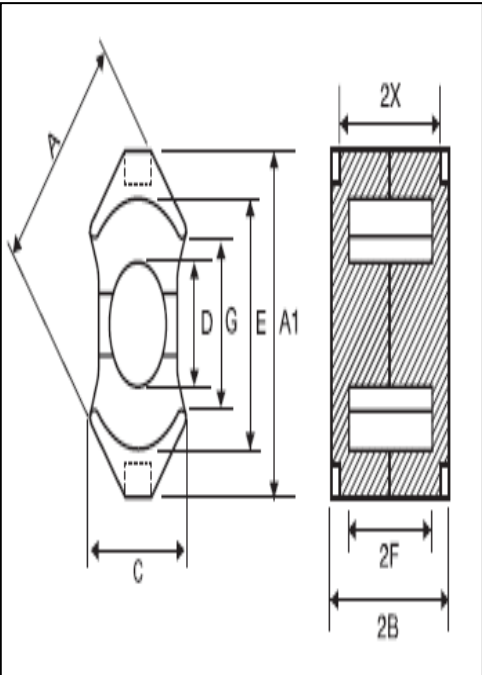


Technical Data Sheet RoHS Compliant Product

RM4, No Gap Core, MnZn

Product Specifications:

| Parameter | | Symbol | Unit | Value | Geometry Drawing Reference |
|--------------------------|------------------|----------|-----------------|-------------|--|
| Magnetic Characteristics | Effective Length | l_e | mm | 22.0 |  |
| | Effective Area | A_e | mm ² | 13.0 | |
| | Effective Volume | V_e | mm ³ | 286.0 | |
| Dimensions | A | - | mm | 9.60 ±0.20 | |
| | A1 | - | mm | 10.80 ±0.20 | |
| | B | - | mm | 5.20 ±0.05 | |
| | C | - | mm | 6.40 ±0.20 | |
| | D | - | mm | 3.80 ±0.10 | |
| | E | - | mm | 8.15 ±0.15 | |
| | F | - | mm | 3.60 ±0.10 | |
| | G | - | mm | 5.80 min. | |
| | 2X | - | mm | 9.00 ±0.25 | |
| A – A' | - | mm | ≤ 0.20 | | |
| Appx. Weight/Set | Weight | W | gm | 1.65 | |

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc. as per IEC 63093 - 8

Inspection Criteria: IEC 60424, Guide on the limits of Surface Irregularities

Mechanical Strength: IEC 61631 Compliant

Compliant: RoHS & REACH

Test Conditions: 1 kHz/300 mV, Coil - N=100 Turns, 25°C

Power Loss Conditions: 100 kHz, 200 mT, 100°C

| Material Grade | Initial Permeability (μ_i) | AL Value (nH)/Set | PV (W/set) |
|----------------|----------------------------------|-------------------|------------|
| SFP4 | 2300 ±25% | 1100 +30%/-20% | ≤ 0.20 |
| SFP95 | 3300 ±25% | | |
| SFA05 | 5000 ±25% | 1700 +30%/-20% | |
| SFA07 | 7000 ±25% | | |
| SFA10 | 10000 ±30% | | |
| SFA12 | 12000 ±30% | | |

Other AL values/air gaps and materials available on request