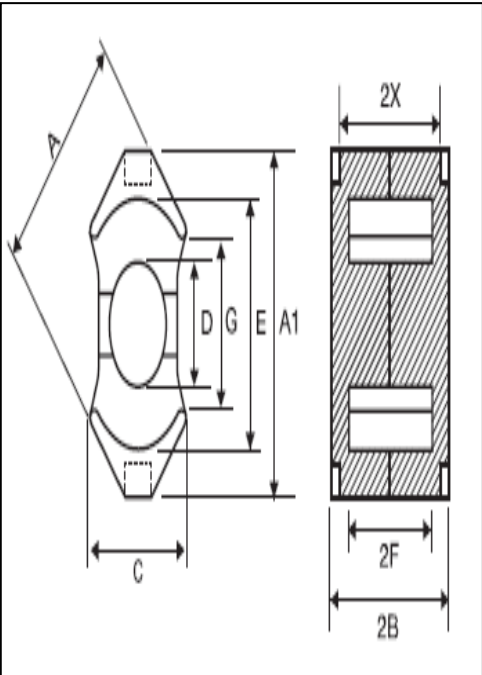


## Technical Data Sheet RoHS Compliant Product

### RM5, No Gap Core, MnZn

#### Product Specifications:

Parameter		Symbol	Unit	Value	Geometry Drawing Reference
Magnetic Characteristics	Effective Length	$l_e$	mm	22.1	
	Effective Area	$A_e$	mm <sup>2</sup>	23.8	
	Effective Volume	$V_e$	mm <sup>3</sup>	526.0	
Dimensions	A	-	mm	12.05 ±0.25	
	A1	-	mm	14.30 ±0.30	
	B	-	mm	5.20 ±0.10	
	C	-	mm	9.55 ±0.25	
	D	-	mm	4.80 ±0.10	
	E	-	mm	10.40 ±0.20	
	F	-	mm	3.35±0.20	
	G	-	mm	6.00 min.	
	2X	-	mm	9.10 ±0.25	
	A – A'	-	mm	≤ 0.20	
Appx. Weight/Set	Weight	<b>W</b>	gm	3.00	

**Appearance & Shape:** To be free from any defect such as flow, burrs, unevenness etc. as per IEC 63093 - 8

**Inspection Criteria:** IEC 60424, Guide on the limits of Surface Irregularities

**Mechanical Strength:** IEC 61631 Compliant

**Compliant:** RoHS & REACH

**Test Conditions:** 1 kHz/300 mV, Coil - N=100 Turns, 25°C

**Power Loss Conditions:** 100 kHz, 200 mT, 100°C

Material Grade	Initial Permeability ( $\mu_i$ )	AL Value (nH)/Set	PV (W/set)
SFP4	2300 ±25%	2000 +30%/-20%	≤ 0.32
SFP95	3300 ±25%	2450 +30%/-20%	≤ 0.20
SFA05	5000 ±25%	3500 +30%/-20%	
SFA07	7000 ±25%		
SFA10	10000 ±30%		
SFA12	12000 ±30%	7500 Min	

Other AL values/air gaps and materials available on request