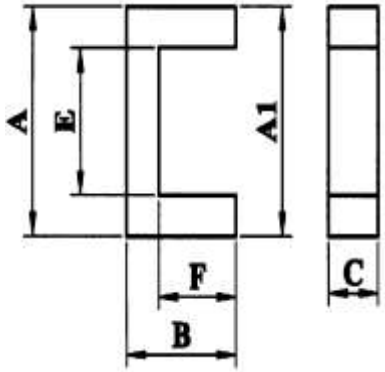


Technical Data Sheet RoHS Compliant Product

UU10.5, No Gap Core, MnZn

Product Specifications:

Parameter		Symbol	Unit	Value	Geometry Drawing Reference
Magnetic Characteristics	Effective Length	l_e	mm	40.0	
	Effective Area	A_e	mm ²	13.0	
	Effective Volume	V_e	mm ³	518.0	
Dimensions	A	-	mm	10.50 ±0.30	
	B	-	mm	8.00 ±0.30	
	C	-	mm	5.00 ±0.15	
	E	-	mm	5.30 min	
	F	-	mm	5.50 ±0.30	
	A-A'	-	mm	≤ 0.10	
Appx. Weight/Piece	Weight	W	gm	2.22	

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc. as per IEC 63093 - 8

Inspection Criteria: IEC 60424, Guide on the limits of Surface Irregularities

Mechanical Strength: IEC 61631 Compliant

Compliant: RoHS & REACH

Test Conditions: 1 kHz/300 mV, Coil - N=100 Turns, 25° C

Material Grade	Initial Permeability (μ_i)	AL Value (nH/Set)	PV (W/Set)
SFP4	2300 ±25%		
SFP95	3300 ±25%		
SFA05	5000 ±25%		
SFA07	7000 ±25%		
SFA10	10000 ±30%	≥ 3000	
SFA12	12000 ±30%	≥ 3500	

Other AL values/air gaps and materials available on request