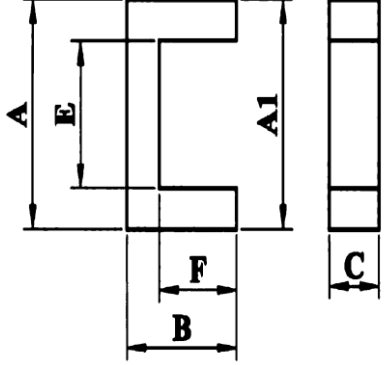


Technical Data Sheet RoHS Compliant Product

UU93/76/30, No Gap Core, MnZn

Product Specifications:

Parameter		Symbol	Unit	Value	Geometry Drawing Reference
Magnetic Characteristics	Effective Length	l_e	mm	354.0	
	Effective Area	A_e	mm ²	840	
	Effective Volume	V_e	mm ³	297000	
Dimensions	A	-	mm	93.00 ± 1.80	
	B	-	mm	76.00 ± 0.50	
	C	-	mm	30.00 ± 0.60	
	E	-	mm	34.60 min	
	F	-	mm	48.0 ± 0.90	
	A-A'	-	mm	≤ 0.80	
Appx. Weight/Set	Weight	W	gm	1500	

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc. as per IEC 63093 - 8

Inspection Criteria: IEC 60424, Guide on the limits of Surface Irregularities

Mechanical Strength: IEC 61631 Compliant

Compliant: RoHS & REACH

Test Conditions: 1 kHz/300 mV, Coil - N=100 Turns, 25° C

Power Loss Conditions: 25 kHz, 200 mT, 100°C

Material Grade	Initial Permeability (μ_i)	AL Value (nH/Set)	PV (W/Set)
SFP4	2300 ± 25%	6000 ± 25%	≤ 14
SFP95	3300 ± 25%		
SFA05	5000 ± 25%		
SFA07	7000 ± 25%		
SFA10	10000 ± 30%		
SFA12	12000 ± 30%		

Other AL values/air gaps and materials available on request