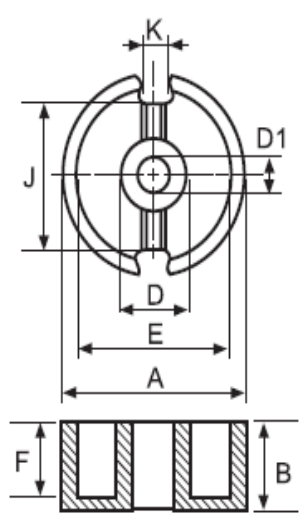


Technical Data Sheet RoHS Compliant Product

POT11*7, No Gap Core, MnZn

Product Specifications:

Parameter		Symbol	Unit	Value	Geometry Drawing Reference
Magnetic Characteristics	Effective Length	I_e	mm	16.3	
	Effective Area	A_e	mm ²	19.0	
	Effective Volume	V_e	mm ³	309.0	
Dimensions	A	-	mm	11.10 ± 0.20	
	B	-	mm	3.30 ± 0.10	
	D	-	mm	4.60 ± 0.10	
	E	-	mm	9.20 ± 0.20	
	F	-	mm	2.30 ± 0.10	
	J	-	mm	6.80 ± 0.25	
	K	-	mm	2.20 ± 0.30	
	D1	-	mm	-	
A - A'	-	mm	≤ 0.10		
Appx. Weight/Set	Weight	W	gm	1.70	

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc. as per IEC 63093 - 8

Inspection Criteria: IEC 60424, Guide on the limits of Surface Irregularities

Mechanical Strength: IEC 61631 Compliant

Compliant: RoHS & REACH

Test Conditions: 1 kHz/300 mV, Coil - N=100 Turns, 25°C

Power Loss Conditions: 100 kHz, 200 mT, 100°C

Material Grade	Initial Permeability (μ_i)	AL Value (nH/Set)	PV (W/Set)
SFP4	2300 ±25%	2000 ±25%	≤ 0.12
SFP95	3300 ±25%		
SFA05	5000 ±25%		
SFA07	7000 ±25%		
SFA10	10000 ±30%		
SFA12	12000 ±30%		

Other AL values/air gaps and materials available on request

Speedofer Components Pvt. Ltd.,

Plot No: 101 & 102, Toy City, Ecotech – III, Greater Noida – 201306, Uttar Pradesh, India. Email: info@speedofer.com URL: www.speedofer.com

Document Reference: SCPL/TDS/POT11*7, No Gap Core, Mar 2024