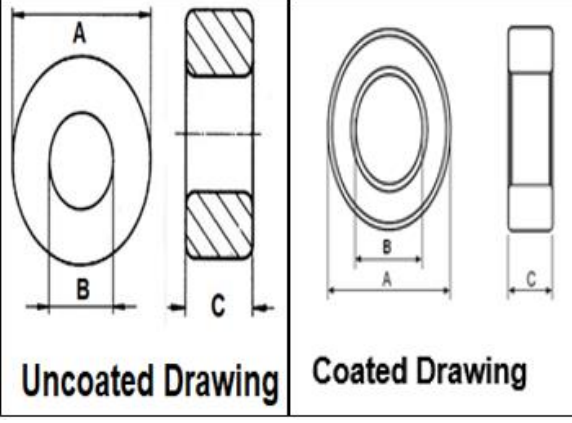
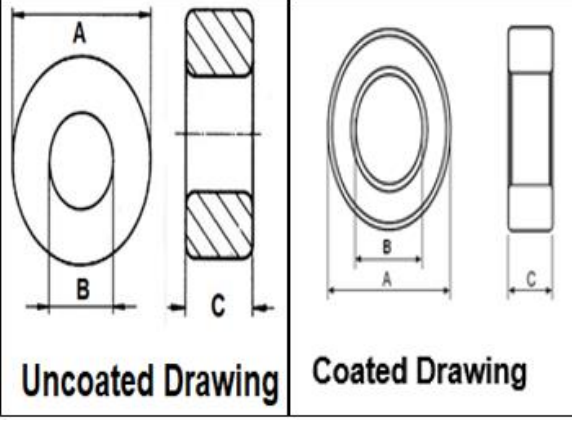


Technical Data Sheet RoHS Compliant Product

T22/14/6.5, MnZn

Product Specifications:

Parameter		Symbol	Unit	Uncoated	Coated	Geometry Drawing Reference	
Magnetic Characteristics	Effective Length	I_e	mm		54.67		
	Effective Area	A_e	mm ²		25.56		
	Effective Volume	V_e	mm ³		1397.42		
Dimensions	A	-	mm	22.0 ±0.40	23.00 Max		
	B	-	mm	14.0 ±0.40	13.00 Min		
	C	-	mm	6.5 ±0.30	7.40 Max		
Appx. Weight/Piece	Weight	W	gm	3.75	3.75		

Appearance & Shape: To be free from any defect such as flow, burrs, unevenness etc. as per IEC 63093 - 8

Inspection Criteria: IEC 60424, Guide on the limits of Surface Irregularities

Mechanical Strength: IEC 61631 Compliant

Compliant: RoHS & REACH

Test Conditions: 10kHz/300 mV, Coil - N=1 Turns, 25°C

Material Grade	Initial Permeability (μ_i)	AL Value (nH)	
SFA04	2300 ±25%	1473 ±25%	
SFA05	5000 ±25%	2940 ±25%	
SFA07	7000 ±25%	4110 ±25%	
SFA10	10000 ±30%	5870 ±30%	
SFA12	12000 ±30%	6930 ±30%	